

IMPORTANT! PLEASE READ BEFORE YOU START

These easy instructions are intended to guide you through the replacement process.

- ✓ To avoid electric shock please make sure product is turned off and AC Adaptor is disconnected from the power source. Remove jewelry before you begin work to avoid scratching the surface of your notebook computer.*
- ✓ Place your notebook computer on a clean, stable and covered surface to avoid damage to the computer's case.*
- ✓ Follow the ESD (Electrostatic Discharge) damage prevention instructions:
 - Hold parts by the edges, away from exposed circuitry when possible.
 - Do not walk around excessively as this promotes static build-up.
- ✓ The appearance of the electronic components shown in the illustrations may be different from the components shipped. This slight difference does not affect the accuracy of these instructions.

* Sony is not responsible for any loss of data associated with your computer or any damage caused by incorrect handling of the computer under these procedures. The terms of your Sony Limited Warranty continue to apply.



Step 1. Prepare the Computer.

⚠ CAUTION: Make sure the computer is turned off, the lid is closed, and the AC Adapter is disconnected. Failure to do so can result in damage to the computer.

Place the computer upside down on a protected surface with the Battery door facing you.



Step 2. Remove the Battery Pack.

Locate the battery door and unlock it. With your thumbs, pull the battery in the release direction as shown in the picture.




Step 3. Remove completely the battery pack from the computer and set aside.



ODD BAY

Step 4. Locate the ODD Bay.

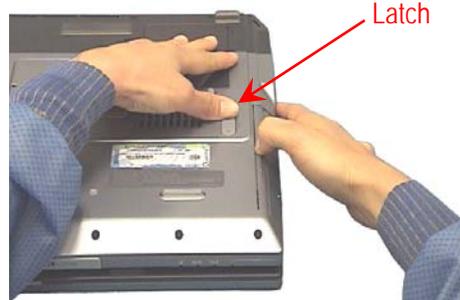

Step 5. Unlock the ODD Latch.

Use your thumb and gently slide the ODD latch in to release direction. Firmly grasp the CD/DVD drive and slide it away from the computer as shown



Step 6. Gently pull the original ODD Bay away from the computer as shown.



Step 7. Install New ODD Bay.

Hold the new ODD Bay by the edges and align it with the opening. With an even force slide in the new HDD Bay.

Make sure the new ODD Bay is seating flush on the edge of the computer.

Step 8. Reinstall the Battery Pack and reconnect the AC Adapter.

Return the old ODD Bay to Sony following the included shipping instructions.